

Kelba Shearbeam Loadcell Model: KA-250S

General Specifications

Rated Capacity: 250kg
 Safe Load Limit: 375kg (static)

Construction: Stainless steel
 Protection: NA
 Cell Weight: 0.4kg

Electrical

Excitation Voltage: 5 - 15 V.D.C.
 Output at rated: 2.2mV/V +/- 0.5% capacity

Cable length: 6000mm (std)

Input impedance: 380 ohm +/- 6% (black to red)


Output impedance: 350ohm +/- 0.2% (green to white)

Environmental Rating: IP67

* NOTE: Classified by Londonderry Occupational Safety Centre as a "Simple Device" and therefore suitable for hazardous and explosive dust environments subject to installation in compliance with the relevant Australian Standards.

Wiring colour code

Excitation +	Red
Excitation -	Black
Signal +	Green
Signal -	White
Shield	Bare

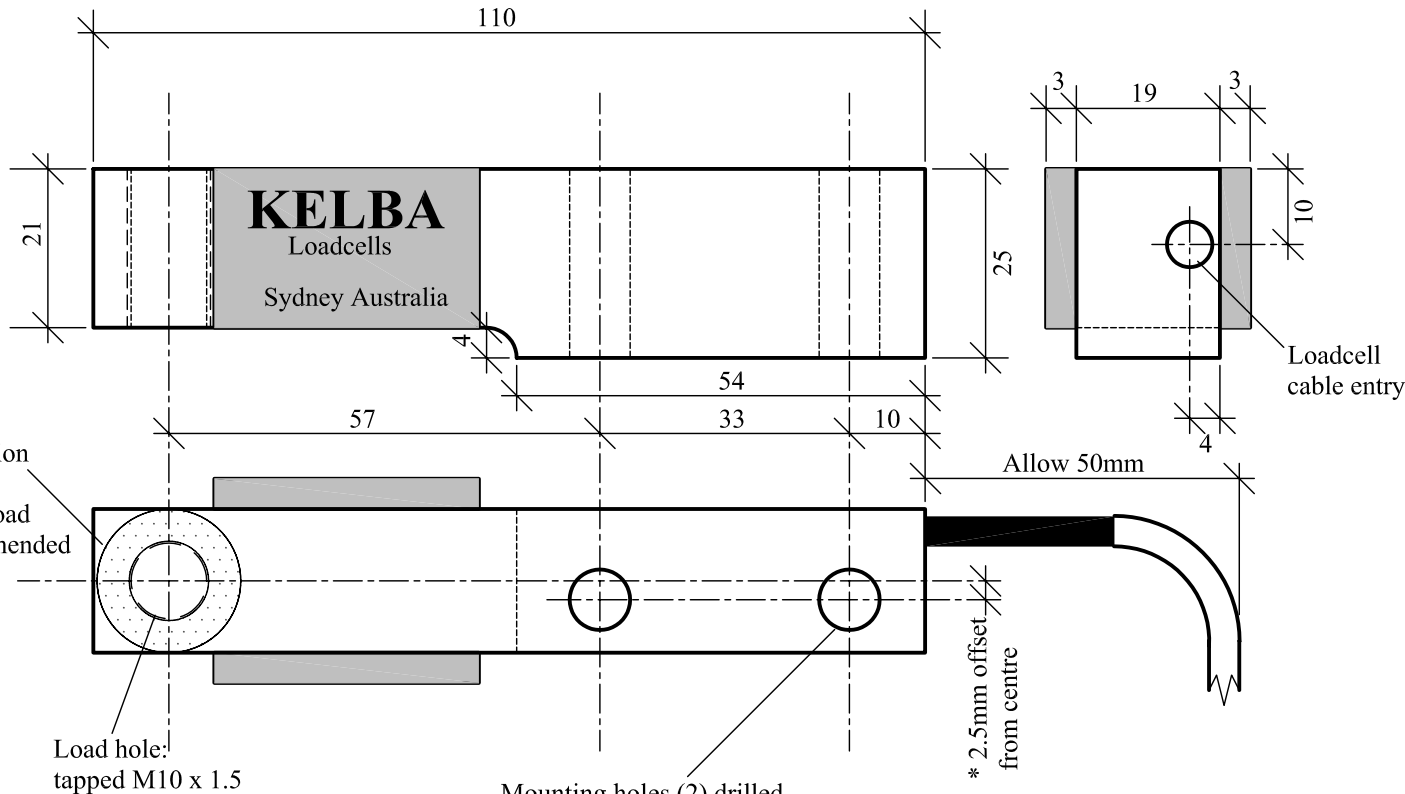

Shaded section represents maximum load area recommended (19mm)

Load hole: tapped M10 x 1.5

Mounting holes (2) drilled M8 clearance - bolts to be 8.8 grade (min) hi-tensile socket head cap screw or hex. head bolt.
 Bolt length: Sufficient to ensure a min. of 1.25 x bolt diameter into mounting base plate

* NOTE: mounting hole centre line is offset 2.5mm from loadcell centre line

Mounting Accessories

- Rubber Mount - see drg K-043-1
- Load button - see drg KLBM 10

Bolt Torque: 22 Nm
 16.2 ft lb
 (M8 x 1.25 CLASS 8.8 Grade to AS1110)

